

# **Technology**



### SUPERFICIAL RADIO FREQUENCY

Superficial radio frequency 4 modes to treat at different depths

### **INTELLIGENT PARAMETERS**

Power levels can be set from 2 to 2 watts to minimize power losses

### **COMFORTABLE AND PAINLESS**

greater comfort.

operation (FC, FS and BS).





### Cellulite

Leaseir SRF is a bipolar radio frequency, with two Facial Suction and Body Suction heads, designed to treat cellulite nuclei, while strengthening existing collagen fibers, giving a more toned and firmer appearance to the skin.

In both headpieces, the radio frequency and the suction favor the natural regeneration processes of the organism.

RF energy is specifically targeted at fatty accumulations, while vacuum manipulation increases blood circulation and lymphatic drainage, increasing treatment efficiency.

### Flaccid Skin

Collagen fibers weaken over time due to aging and stress.

Leasier SRF, with its Facial Cold and Facial Suction handpieces, heats the skin between 39 ° and 41 °, stimulating collagen synthesis to strengthen existing fibers and improving laxity, flaccid skin and texture. The isolation and filling results are immediate, given the contraction and long-term strengthening of fibers in skin tissues, making the skin smoother and firmer.

# **Treatment**



A quality device, easy-to-maintain and work that is controlled by a 15-inch touch interface.

Highly effective treatment with visible results from the first session. Leaseir SRF allows the power to be increased from 2W to 2W to fully adapt to the treatment requirements.

It can be applied to all kinds of people and at any time of the year. Safe, non-invasive treatment without any adverse effects.

### & CELLULITE

20 to 30 minute sessions

Cycle between 6-8 sessions depending on the case

1 treatment per week For maintenance 1 every 3-4 months

#### ♣ FLACCID SKIN

15 to 20 minute sessions

Cycle between 3-5 sessions depending on the case

1 treatment every 3 weeks
For maintenance
1 every 3-5 months

# **Features**

# DEVICE

DIMENSIONS	475mm × 758mm × 1133mm (W × L × H)
WEIGHT	38 Kg

INTERFACE Touch LCD Display

## **FEATURES**

RF INTENSITY	Up to 50 Watts (BS Applicator) Up to 20 Watts (FS Applicator) Up to 130 J/cm³ (FC Applicator)
RF MODE	Frequency Mode I - 0.8 MHz Frequency Mode II - 1.7 MHz Frequency Mode III - 2.45 MHz Frequency Mode IV - 0.8 MHz, 1.7 MHz, 2.45 MHz
SUCTION - COOLING	BS Applicator - Suction when pressing FS Applicator - Suction when pressing FC Applicator - Active cooling
TREATMENT AREA SIZES	BS Applicator : 35mm X 30mm FS Applicator: 15mm X 10mm FC Applicator : 8mm X 8mm
ELECTRICAL REQUIREMENTS	90-264 VAC; 50/60Hz; Single Phase
VOLTAGE REQUIREMENS	Maximum 700 Watts


## OTHER INFORMATION

Insured with maintenance contract, after the first year

Consumables without programmed obsolescence

Own technical service

Designed and manufactured in Spain

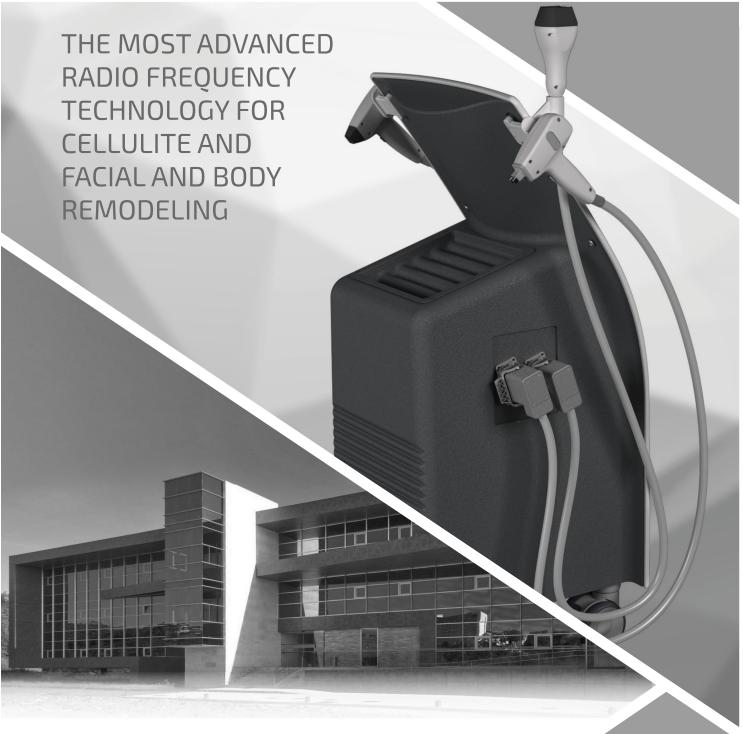

The professionals who integrate Leaseir Medical Light have been working at the forefront of aesthetic equipment technology for more than 18 years.

We are committed to the needs of professionals and are confident of providing the results your customers demand.

Our main objective is quality, which is why our devices have the best features to optimize results and ensure customer satisfaction.





M: +971 55 386 5007 samer.sfeir@laserville.net www.laserville.net Samer Sfeir Managing Director